

INSTALLATION INSTRUCTIONS

07 JEEP Wrangler 2Dr and 4Dr Taillight Guards

PART NUMBER 32210 / 32217

PARTS LIST:

| | | | |
|---|------------------------------|---|-----------------|
| 2 | Tail Light Guards | 8 | Rubber Spacers |
| 4 | #6 X 45mm Sheet Metal Screws | 8 | #8 Flat Washers |
| 4 | #8 x 50mm Sheet Metal Screws | | |

PROCEDURE:

1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY.
2. Using a Phillips screwdriver remove the screws from the driver side taillight lens (Figure 2). Note that inner factory screws will be replaced by #6 x 45mm Sheet Metal Screws and the outer factory screws with #8 x 50mm Sheet Metal Screws provided in the Hardware Kit. See figure 1.
3. Place Rubber Spacers between the taillight lens and the Tail Light Guard, then position Tail Light Guard onto lens (Figure 3).
4. Position the guard while inserting the screw into its hole in the lens. **NOTE:** Taillight Light Guards will fit either side, left or right. Install the screw tightly enough to keep the guard in place.
5. Install the other three screws. Align the guard with the top of the lens and tighten the screws using a Phillips screwdriver (Figure 4). **Warning!** Avoid over tightening to prevent damage
6. Repeat operation with the other side of the vehicle and check that the two guards are parallel to each other.




Figure 1

Place Rubber Spacer
between taillight lens
and Tail Light Guard

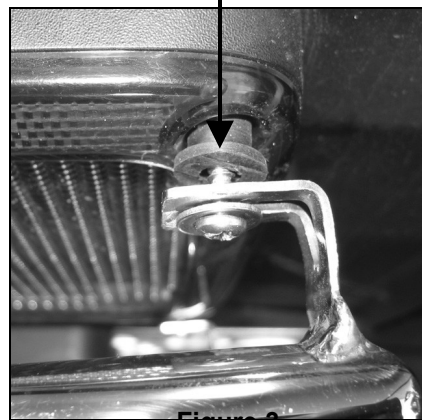


Figure 3

Driver Side Shown

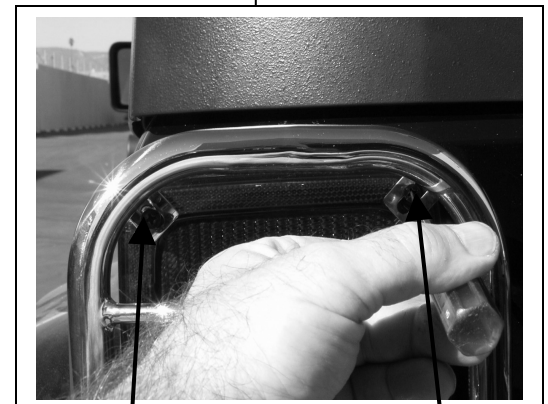


Figure 4

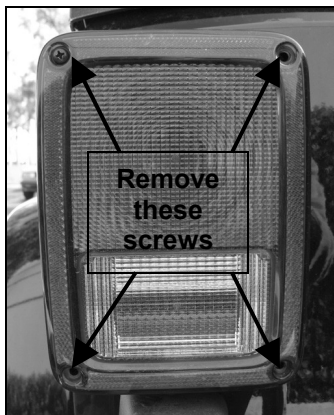


Figure 2

#8 x 50mm
Sheet Metal
Screws on
Left Top &
Bottom

#6 x 45mm
Sheet Metal
Screws on
Right Top &
Bottom