

# INSTALLATION INSTRUCTIONS

## TAILLIGHT GUARD

### 07 MERCEDES BENZ ML SERIES

#### PART NUMBER # 39030 / 39037

**PARTS LIST:**

1	Driver/Left Taillight Guard	1	Driver/ Left Nut Plate
1	Passenger/Right Taillight Guard	1	Passenger/Right Nut Plate
2	130mm "L" Brackets	2	6-1.00mm x 20mm Phillips Screws
2	50mm "L" Brackets	6	4-.75mm x 10mm Philips Screws
2	75mm Bracket	6	4mm ID x 9mm OD x 1mm Flat Washers
		2	3/4" x 3/4" Double Side Tape Pieces

**PROCEDURE:**

1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.
2. **IMPORTANT!** Before starting the installation, cover the painted finish edge around the taillight housing with masking tape to protect the finish of the vehicle when removing the taillight housing and installing the Taillight Guard.
3. Open the rear door and remove the passenger side panel to access the back side of the taillight. Unplug taillight harness. This is the same procedure required to change a burn out taillight bulb in the assembly. For more info see owner's manual on replacing burn taillight bulbs.
4. Once you have unplugged the harness from taillight housing, proceed to remove the four factory nuts holding the taillight housing to vehicle.
5. Once the hex nuts are removed, proceed to remove the taillight. Grasp the taillight assembly with one hand and pull gently. Be sure to pull straight out towards the rear of the vehicle and to the side, to avoid possible damage.
6. Locate the passenger side Taillight Guard and place it on a clean working area. Place taillight housing over Taillight Guard. Insert the passenger side Nut Plate into factory cavity on the upper side of taillight housing towards the rear door (**Figure 2 & 4**).
7. Attach (1) 75mm Bracket to already inserted Nut Plate using the included (1) 6mm x 20mm Phillips Screw (**Figure 2**). **NOTE:** Use bigger hole on the bracket to attach it to taillight housing.
8. Proceed to attach opposite side of Bracket to Taillight Guard using the included (1) 4mm x 10mm Phillips Screw with (1) 4mm Flat Washer (**Figure 3 & 6**).
9. Place 1 piece of Double Side Tape on the 50mm "L" Bracket as shown in Figure 4. Align hole on the "L" Bracket with hole on the Taillight guard then attach Bracket to taillight Housing as shown in Figure 4. Secure Bracket to Taillight Guard using the included (1) 4mm x 10mm Phillips Screws (**Figure 4 & 5**).
10. Engage the 130mm "L" Bracket to the factory threaded stud on lower part of the taillight housing as shown in figure 4 & 6. Attach opposite side to Taillight Guard using the included (1) 4mm x 10mm Phillips Screws (**Figure 4 & 6**).
11. Tighten all hardware at this time. Re-install the taillight with Taillight Guard Assembly back onto the vehicle using the factory hardware removed in step 4.
12. Re-connect the wire harness.
13. Repeat steps 2 – 12 for driver side Taillight Guard.
14. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

130mm "L" Bracket  
(2 pcs)



75mm Bracket  
(2 pcs)



50mm "L" Bracket  
(2 pcs)



1 of 4

Driver Side Nut Plate  
(1 pc)



Passenger Side  
Nut Plate  
(1 pc)




37



(AM)




# Passenger Taillight Guard Installation Shown

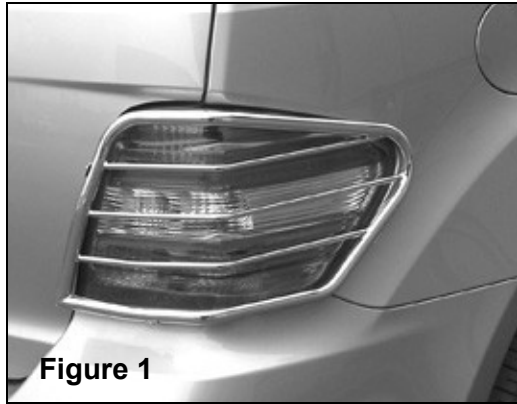


-Passenger Side Nut Plate  
-6mm x 20m Phillips Screw

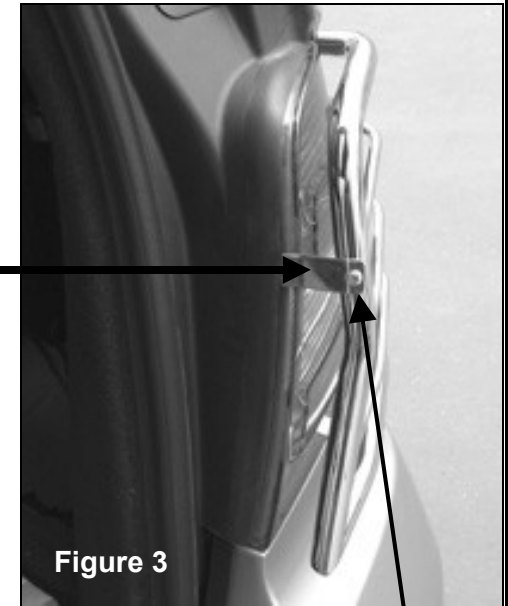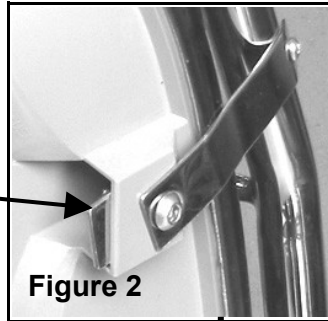

Double Side Tape

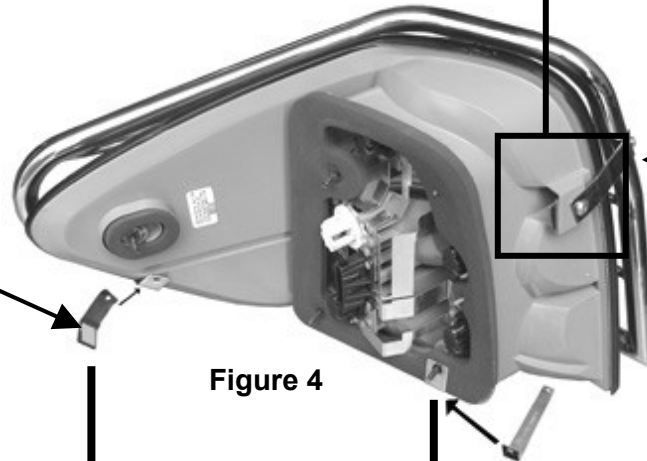


-75mm Bracket  
-4mm x 10mm Phillips Screw  
-4mm Flat Washer

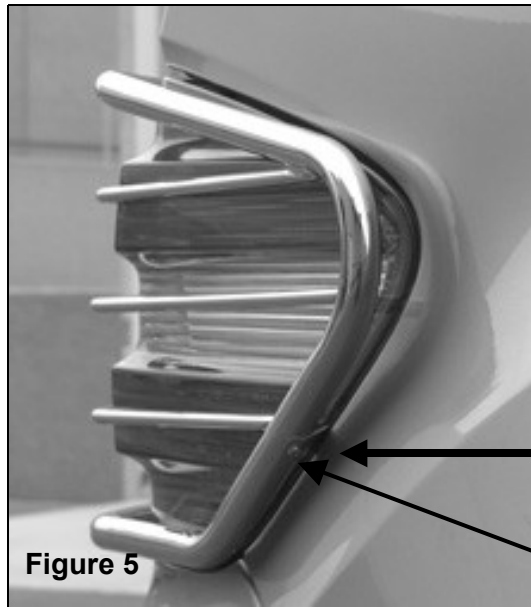

-50mm "L" Bracket  
-4mm x 10mm Phillips Screw

-130mm "L" Bracket  
-4mm x 10mm Phillips Screw

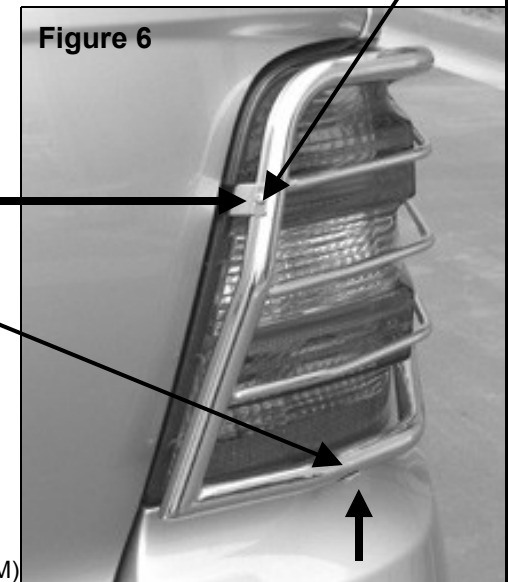

---