

INSTALLATION INSTRUCTIONS



BULL BAR

07 FORD EXPEDITION

PART

PARTS LIST:

1	Bull Bar	8	12-1.75mm x 35mm Hex Head Bolts
1	Driver/Left Mounting Bracket	8	12mm Lock Washers
1	Passenger/Right Mounting Bracket	4	12mm Hex Nuts
2	12mm Double Nut plate	12	12mm ID x 29mm OD x 3mm Flat Washers

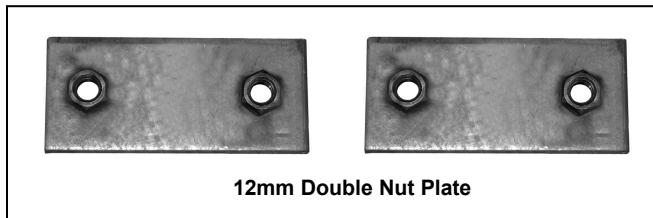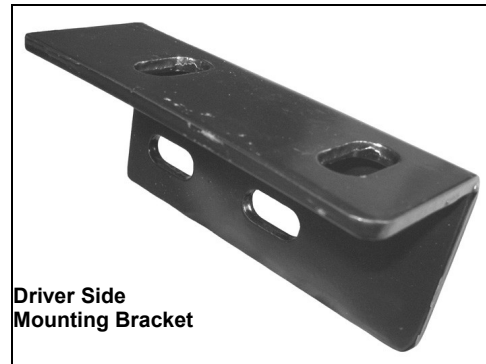

PROCEDURE:

- 1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.**
- 2. NOTE:** It may be necessary to remove/relocate front license plate and license plate bracket. It is not required, but strongly recommended. If local/state law requires a license plate, license plate relocation kit is available.

3. From underside of vehicle, remove factory tow hooks from vehicle if equipped. **NOTE:** This Bull Bar is not compatible with factory tow hooks, so you will not be reinstalling factory tow hooks back onto vehicle.


4. Starting on the driver side of the vehicle, insert (1) 12mm Double Nut Plate through the front end of the frame. Align welded nut on the plate with the factory holes in the bottom of the frame rail. Partially hang driver side Mounting Bracket to inserted Double Nut Plate using the included (2) 12mm x 35mm Hex Head Bolts, (2) 12mm Lock Washers, and (2) 12mm Hex Nuts. Repeat this step for passenger side.
5. With help position the Bull Bar on the outer side of Mounting Brackets. Use the included (4) 12mm x 35mm Hex Bolts, (4) 12mm lock Washers, (4) 12mm Hex Nuts, and (8) 12mm Flat Washers to attach the Bull Bar to Mounting Brackets. Do not tighten at this time.
6. Adjust Bull Bar properly, and then tighten all hardware at this time.
7. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.


For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Bull Bar.

For gloss black finishes: Mild soap may be used to clean the Bull Bar.

Driver Side Installation Shown

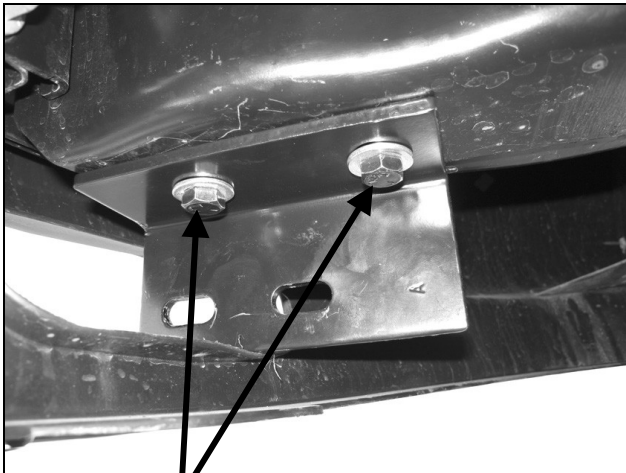

(Double Nut Plate)
 12mm x 35mm Hex Head Bolts
 12mm Lock Washers
 12mm Flat Washers

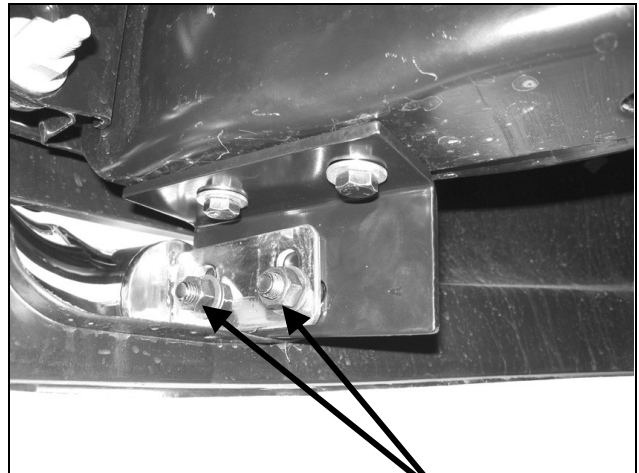

12mm x 35mm Hex Head Bolts
 12mm Lock Washers
 12mm Flat Washers
 12mm Hex Nuts

