

INSTALLATION INSTRUCTIONS

REAR BUMPER GUARD (Double Tube)

01-07 TOYOTA SEQUOIA

PART

PARTS LIST:



1	Rear Bumper Guard
---	-------------------

PROCEDURE:

1. REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.
2. **IMPORTANT!** *Due to the passenger side mounting location being too close to the muffler, before starting the installation make sure the muffler is not hot.* From underside of vehicle, locate the three factory bolts and one factory nut at the end of each chassis. Remove the two rear factory bolts (closest to the factory nut) at each end of chassis (**Figure 1**).
3. With help position Rear Bumper Guard to the previously removed factory bolt locations. Attach Rear Bumper Guard to the chassis using the factory bolts. Do not tighten at this time (**Figure 2**).
4. Adjust Rear bumper Guard properly; and then tighten all hardware at this time.
5. Do periodic inspections to the installation to make sure that all hardware is secure and tight.

To protect your investment, wax this product after installing. Regular waxing is recommended to add a protective layer over the finish. Do not use any type of polish or wax that may contain abrasives that could damage the finish.

For stainless steel: Aluminum polish may be used to polish small scratches and scuffs on the finish. Mild soap may be used also to clean the Rear Bumper Guard.

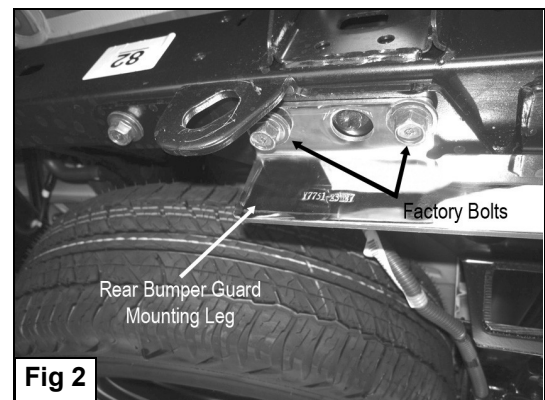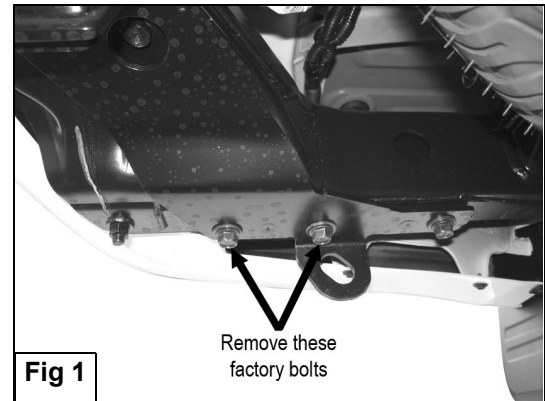

For gloss black finishes: Mild soap may be used to clean the Rear Bumper Guard.